RoHS

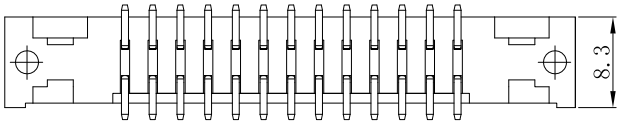



L/长耳扣



S/短耳扣

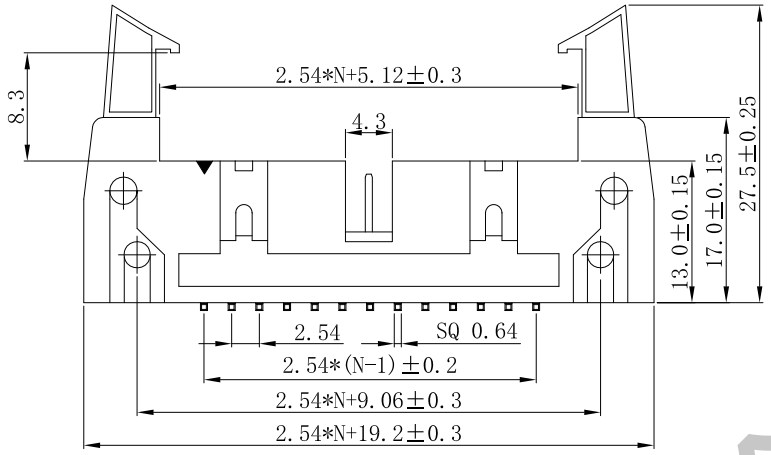

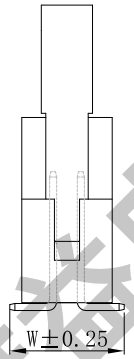

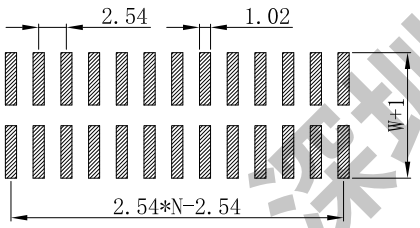

PCB LAYOUT

SPECIFICATIONS

Currrnt Rating:3 AMP
Insulator Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Withstanding Voltage:AC 500V
Operating Temperature:-40℃ to +105℃
Max Processing Temp:230° -260° for 30-60 seconds
Insulator:Glass filled PA6T (UL94V-0),Black
Contacts:Brass

Ordering Information

A NJ 254- XX M C X XX X 01

- 254: 127=1.27mm; 200=2.0mm; 254=2.54mm
- XX: 6-64P
- M: S=180度; R=90度; M=SMT; Z=卧贴
- C: A=PBT; B=PA66; C=PA6T; D=PA9T; E=LCP
- X: L=长耳扣; M=中耳扣; S=短耳扣
- XX: 10=镀金0.8U; 11=镀金1U; 12=镀金1.5U; 13=镀金2U; 14=镀金3U; 15=镀金5U; 16=镀金10U; 17=镀金15U; 18=镀金30U; 20=镀锡; 21=半金锡1U; .....
- X: P=袋装; H=盒装; T=管装; R=卷装

深圳市金维益电子有限公司

CNJWY® 深圳市金维益电子有限公司
ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:			TITLE: 型号:	牛角EH-04
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:			Part No: 料号:	ANJ254-XXMCXXXX01
0~3	±0.10	ANGLE	±1°	DR. 设计:	沈琼章	2023/07/28	Part No: 客户料号:	/