




RoHS

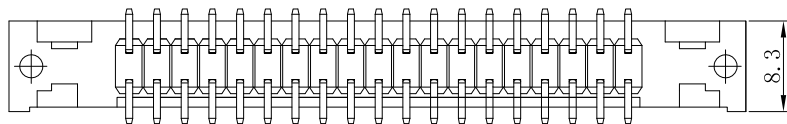



L/长耳扣



S/短耳扣

SPECIFICATIONS

- Current Rating: 3 AMP
- Insulator Resistance: 1000MΩ Min.
- Contact Resistance: 20mΩ Max.
- Withstanding Voltage: AC 500V
- Operating Temperature: -40°C to +105°C
- Max Processing Temp: 230° -260° for 30-60 seconds
- Insulator: Glass filled PA6T (UL94V-0), Black
- Contacts: White

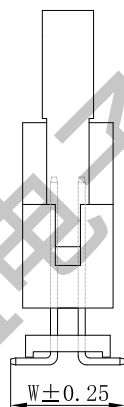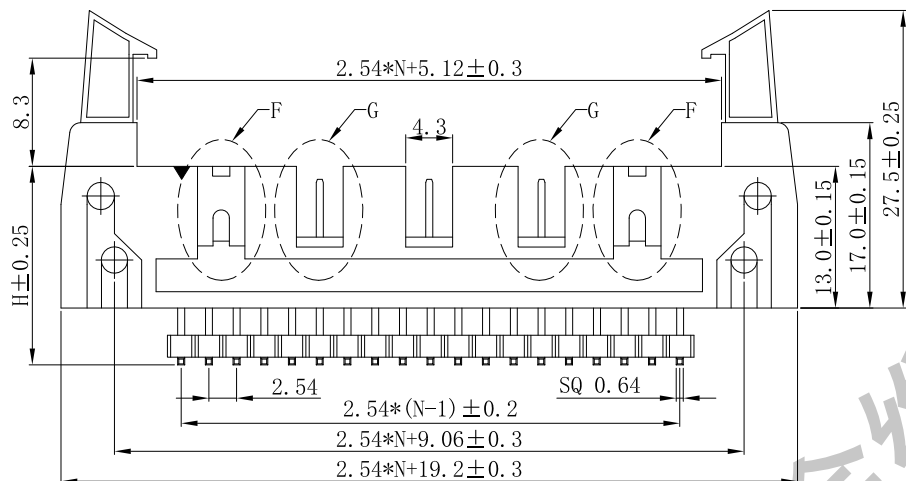


Ordering Information

A NJ 254- XX M C X XX X 01

- 127=1.27mm
- 200=2.0mm
- 254=2.54mm
- 6-64P
- S=180度
- R=90度
- M=SMT
- Z=卧贴
- A=PBT
- B=PA66
- C=PA6T
- D=PA9T
- E=LCP
- L=长耳扣
- M=中耳扣
- S=短耳扣
- 10=镀金0.8U
- 11=镀金1U
- 12=镀金1.5U
- 13=镀金2U
- 14=镀金3U
- 15=镀金5U
- 16=镀金10U
- 17=镀金15U
- 18=镀金30U
- 20=镀锡
- 21=半金锡1U
-
- P=袋装
- H=盒装
- T=管装
- R=卷装

G在60P及64P才有
F在18P及18P以上才有

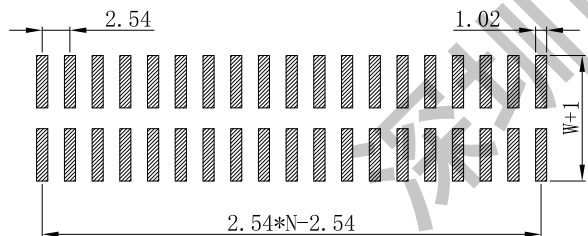

PCB LAYOUT



深圳市金维益电子有限公司

ShenZhen CNJWY Electronic Co.,Ltd

| | | | | | | | |
|------|-------|---------------|-----|--------------|----------------|-------------------|------------------|
| >10 | ±0.30 | SCALE: 比例: | 1:1 | APPD. 核准: | | TITLE: 型号: | 牛角EH-12 |
| 3~10 | ±0.20 | UNIT: 单位: | mm | CHKD. 审核: | | Part No: 料号: | ANJ254-XXMCXXX01 |
| 0~3 | ±0.10 | ANGLE | ±1° | DR. 设计: | 沈琼章 2023/07/28 | Part No: 客户料号: | / |