

ROHS

SPECIFICATION

MATERIAL

Housing: PBT+30%G.F UL94V-0

Contacts: PhosPhor Bronze

ELECTRICAL



Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

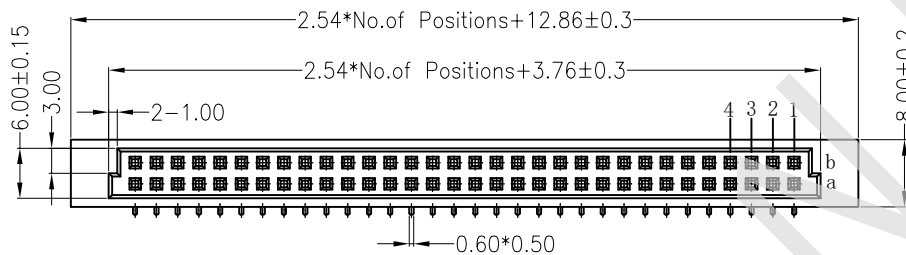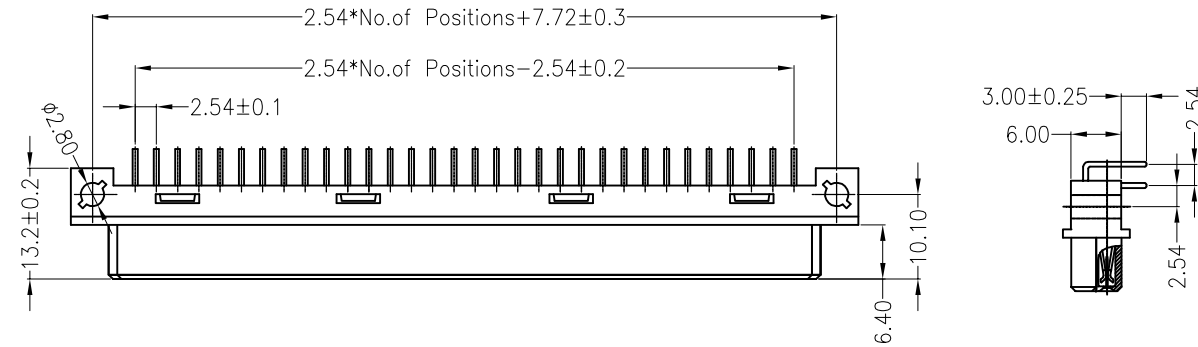

Ordering Information


A OS 254 - F 2 XX R XX X 01

200=2.0mm
254=2.54mm

10-64P S=180度
R=90度

10=Gold flash
11=镀金1U
12=镀金1.5U
13=镀金2U
14=镀金3U
15=镀金5U
16=镀金10U
17=镀金15U
18=镀金30U
20=镀锡
21=半金锡1U
.....

P=袋装
H=盒装
T=管装
R=卷装

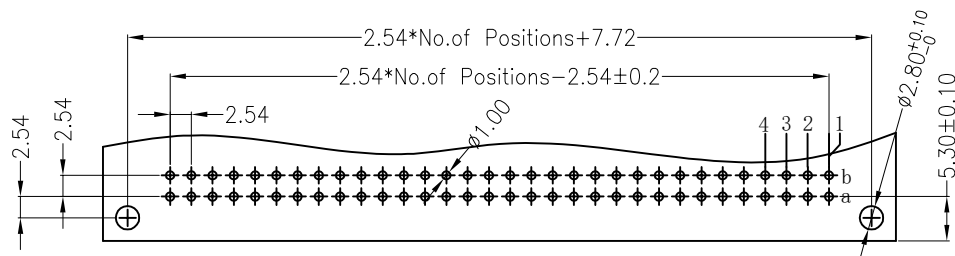

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

深圳市金维益电子有限公司
 ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:		TITLE: 型号:	欧式插座 2XNP 弯母
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:		Part No: 料号:	A0S254-F2XXXXXX01
0~3	±0.10	ANGLE	±1°	DR. 设计:	金承鑫 2021.04.16	Part No: 客户料号:	

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作