
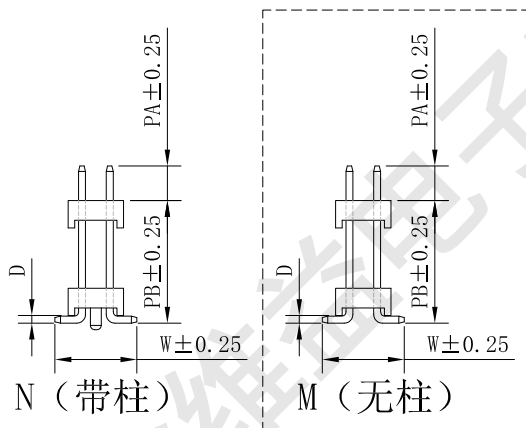
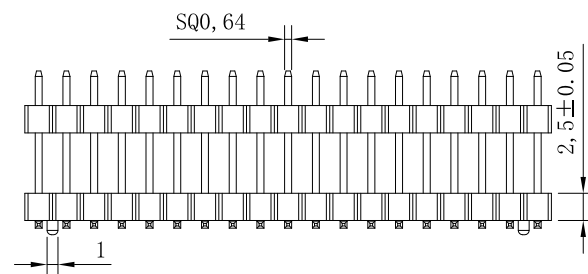


RoHS

SPECIFICATIONS

Current Rating: 3 AMP
 Insulator Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Withstanding Voltage: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° -260° for 30-60 seconds
 Insulator: Glass filled PA6T (UL94V-0), Black
 Contacts: Brass

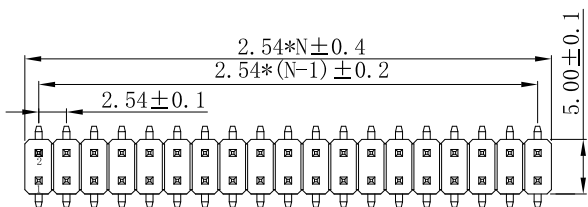

Ordering Information

A PH 254 25-2 2 XX S C M XX 115 X 01

080=0.8mm
 100=1.0mm
 127=1.27mm
 200=2.0mm
 254=2.54mm

1-40PS=180度
 R=90度
 M=SMT
 Z=卧贴


A=PBT
 B=PA66
 C=PA6T
 D=PA9T
 E=LCP

M=无柱
 N=带柱

10=Gold flash
 11=镀金1U
 12=镀金1.5U
 13=镀金2U
 14=镀金3U
 15=镀金5U
 16=镀金10U
 17=镀金15U
 18=镀金30U
 20=镀锡
 21=半金锡1U

针长
 115=11.5mm

P=袋装
 H=盒装
 T=管装
 R=卷装

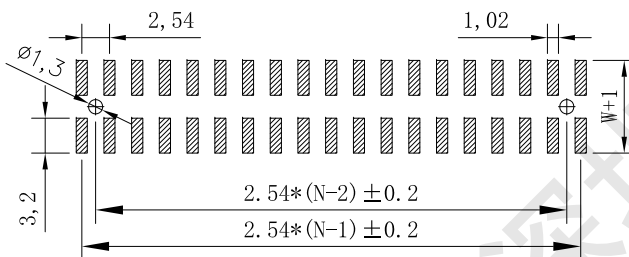

PCB LAYOUT

CNJWY 深圳市金维益电子有限公司
 ShenZhen CNJWY Electronic Co.,Ltd

>10	±0.30	SCALE: 比例:	1:1	APPD. 核准:		TITLE: 型号:	排针ST-09
3~10	±0.20	UNIT: 单位:	mm	CHKD. 审核:		Part No: 料号:	APH25425-2219MCNXXXXXX01
0~3	±0.10	ANGLE	±1°	DR. 设计:	沈琼章 2023/08/05	Part No: 客户料号:	/